

Application Note


Fiber Optic Temperature Array Sensors for the Kraft Pulping Process

THE CHALLENGE

In the Kraft pulping process, wood is converted into wood pulp containing cellulose fibers for the production of paperboard and paper. The process is becoming increasingly sophisticated with new and higher requirements driven by, for example, larger quantities of high-value secondary product streams such as liginosulfonates and crude tall oils. In addition, more demands will be seen on the energy production out of the process combined with larger variations in feedstock and produced products. To meet these new requirements, the sizes and sophistication of the process equipment are increasing. Process monitoring for optimisation is, therefore, becoming increasingly important. This leads to a growing need to collect high-quality data from a large number of temperature measurement points to enable live visualization of the process for operators, and to instantly supply DCS and PLC systems with fast and accurate process control parameters.


THE SOLUTION

Proximion's optical fiber array temperature sensing is ideally suited to meet this measurement challenge. It uses miniature fiber Bragg grating (FBG) sensors and supports a large number of measurement points with a single sensing cable, is zero power and so intrinsically safe, and provides high resolution dynamic measurements over an extraordinarily large temperature range. With Proximion technology, it becomes possible to follow the process live, store data and distribute control parameters through communication protocols such as OPC-UA etc.

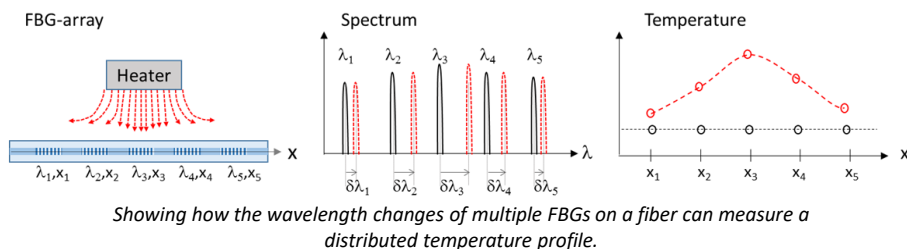

Together with a leading Swedish pulp and paper producer, Proximion engineers have identified several potential applications for fiber optic multi-point temperature sensing. The most promising ones, currently under testing or evaluation are:

- Decantation tanks for the extraction of high-value crude sulphate soaps that are further processed to become crude tall oils (monitoring the separation process);
- Continuous digester for the core pulping process (monitoring the pulping process); and
- Filtrate tanks acting as critical water buffers in the process (monitoring stratification in tanks).

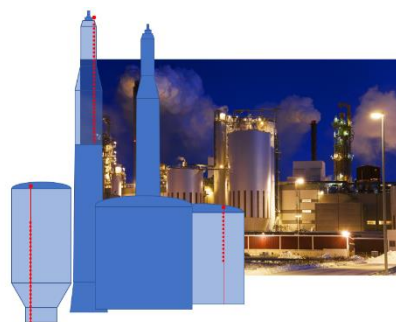


Fiber optic array sensing potential probe locations in the Kraft pulping process: the lower 2/3 of filtrate tanks; the top section of a digester; and in the upper half of decantation tanks for tall oil extraction.


> APPLICATION NOTE Fiber Optic Temperature Array Sensors for the Kraft Pulping Process

In the example below, a Proximion system was installed to monitor the temperature stratification occurring in decantation tanks used for extracting crude sulphate soap. A hot black liquor at ~95°C is feed into the tank from the bottom, a cooler layer of crude sulphate soap is formed above and at the top hot air is present.

The vertically mounted Proximion fiber optic multi spot temperature sensor has been able to follow the thickness and position of the soap layer and see the temperature distribution of the layers. A feedthrough was mounted on the tank roof to fix the sensor and make connection to the instrumentation (interrogator). The measurement length of the sensor was 9 meter and included 91 temperature points. The sensing fiber was encapsulated in a stainless-steel tube with an outer diameter of 2.6 mm and was fixed to the bottom of the tank by a wire. The tests were deemed very successful and a full system serving multiple tanks with a jointly tailored GUI for the operators is now under an investment request.

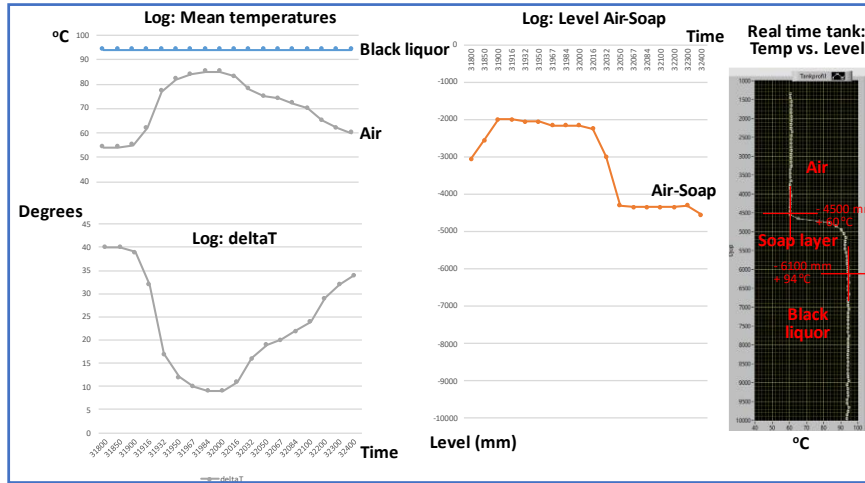

Data from a Proximion installation at major Swedish pulp & paper producer showing the soap layer in a decantation tank.

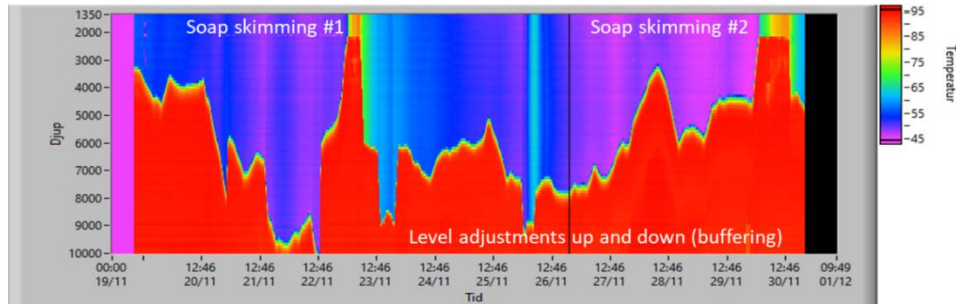

Time series data showing the soap layer movements during the skimming process.

This note has shown the application of Proximion's multi-point temperature sensing technology to the monitoring and optimization of the kraft pulping process, so exploiting the unique advantages of the fiberoptic technology, namely:

- Large number of sensor points – enables array sensing
- Extremely small sensors – fast and precise measurements
- Signals transfer by light – easy cabling over long distances
- Low power light source – intrinsically (EX) safe
- No electronics – very long service life
- Multiplexed telecoms technology – low system cost

THE COMPANY

Part of the huge Hexatronic Group, Proximion AB designs and manufactures customized, high performance fiber optic sensor systems for use in numerous harsh environment applications. Proximion technical experts have experience applying the unique advantages of FBG technology to a wide range of industrial assets, including electric motors, generators, steel foundries, chemical reactors and aircraft. proximion.com.



Proximion AB
Skalholtsgatan 10
SE-164 40 Kista, Sweden

phone: +46 8 750 48 88
info@proximion.com
www.proximion.com

A PART OF HEXATRONIC GROUP

HEXATRONIC